

EX- Cable Gland Continued..... Product Specification

Expandable Sleeve

Expandable Sleeve PET(polyethylene terephthalate) material, excellent application for various bundle wires, wiring harness and hoses protection, etc

Dimensions

NO.	Width	NO.	Width
1	φ3*.BLACK.PET(1***/0.25****x24**)	17	φ10.BLACK.PET(3/0.25x32)
2	φ3.BLACK.PET(1/0.20x32)	18	φ10.BLACK.PET(3/0.20x40)
3	φ4.BLACK.PET(1/0.25x32)	19	φ12.BLACK.PET(3/0.25x40)
4	φ4.BLACK.PET(1/0.20x40)	20	φ12.BLACK.PET(3/0.20x48)
5	φ5.BLACK.PET(1/0.25x40)	21	φ14-φ16..BLACK.PET(3/0.25x48)
6	φ5.BLACK.PET(1/0.20x48)	22	φ14-φ16.BLACK.PET(3/0.20x56)
7	φ6.BLACK.PET(1/0.25x48)	23	φ18-φ20.BLACK.PET(3/0.25x56)
8	φ6.BLACK.PET(1/0.20x56)	24	φ18-φ20.BLACK.PET(3/0.20x64)
9	φ6.BLACK.PET(1/0.20x24)	25	φ22.BLACK.PET(3/0.25x64)
10	φ7.BLACK.PET(1/0.25x56)	26	φ22.BLACK.PET(3/0.20x72)
11	φ7.BLACK.PET(1/0.20x64)	27	φ25.BLACK.PET(3/0.25x72)
12	φ8.BLACK.PET(1/0.25x64)	28	φ25.BLACK.PET(3/0.20x64)
13	φ8.BLACK.PET(1/0.20x72)	29	φ28.BLACK.PET(3/0.25x64)
14	φ8.BLACK.PET(1/0.25x24)	30	φ32.BLACK.PET(3/0.25x72)
15	φ8.BLACK.PET(1/0.20x32)	31	φ36.BLACK.PET(3/0.25x64)
16	φ10.BLACK.PET(1/0.25x72)	32	φ40.BLACK.PET(3/0.25x72)



Features


Good flexibility, easy to bend
Excellent abrasion resistance
Convenient installation
Continuous operating temperature:-45°C-125°C
Fusing point: 250°C±5°C
Flame retardant rating: Self-extinguish
Color: Black or upon request

Spiral Wrapping Bands

Material: made from PE.

Usage: fix one end with safety belt first, then circle the wires clockwise to make them tighen.

Application: a protection wear for electric wires, and make them insulation and look nice.

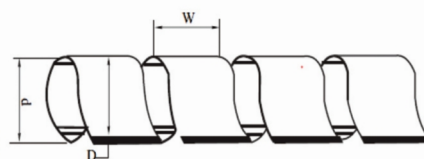

Item NO.	(D) (mm)	(D) (mm)	(W) (mm)	Wrapping Range
SWB-03	1.5	3.0	4.0	1.5-10
SWB-06	4	6	7.0	4-50
SWB-08	6	8	10.8	6-60
SWB-10	7.5	10	11.4	7.5-60
SWB-12	9	12	13.9	9-65
SWB-15	12	15	15.0	12-75
SWB-19	15	19	18.2	15-100
SWB-24	20	24	19.6	20-130
SWB-30	26	30	43.0	26-150

