


## Short Barrel Cable Connector

Cable mm <sup>2</sup>	Dimensions in mm			Product Code
	A	C	J	
1.5	1.8	3.7	12	RCS - 1.5
2.5	2.4	4	15	RCS - 2.5
4	3.1	4.8	15	RCS - 4
6	3.8	5.5	15	RCS - 6
10	4.5	6.2	20	RCS - 10
16	5.4	7.1	20	RCS - 16
25	6.8	8.8	32	RCS - 25
35	8.2	10.6	36	RCS - 35
50	9.5	12.4	40	RCS - 50
70	11.3	14.7	45	RCS - 70
95	13.5	17.4	45	RCS - 95
120	15	19.4	45	RCS - 120
150	16.5	21.2	55	RCS - 150
185	18.5	23.5	60	RCS - 185
240	21	26.5	80	RCS - 240
300	23.5	30	85	RCS - 300
400	28.5	36.5	85	RCS - 400
500	30	39	100	RCS - 500
550	31.7	41.5	110	RCS - 550
630	35	45	110	RCS - 630
800	39	50.6	150	RCS - 800
1000	43	56.2	170	RCS - 1000



Short Barrel Connector

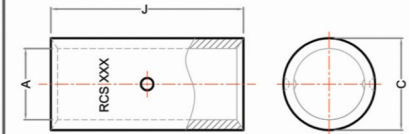

Diagram

### FEATURES


- Connector Short Barrel for limited space applications
- Tin Plated to inhibit corrosion
- Material - Electrolytic Copper
- Internal wire stops provided to prevent over insertion of conductor

## Long Barrel Cable Connector

Cable mm <sup>2</sup>	Dimensions in mm			Product Code
	A	C	J	
1.5	1.8	3.7	22	RCL - 1.5
2.5	2.4	4	22	RCL - 2.5
4	3.1	4.8	22	RCL - 4
6	3.8	5.5	22	RCL - 6
10	4.5	6.2	22	RCL - 10
16	5.4	7.1	44	RCL - 16
25	6.8	8.8	47	RCL - 25
35	8.2	10.6	47	RCL - 35
50	9.5	12.4	47	RCL - 50
70	11.3	14.7	50	RCL - 70
95	13.5	17.4	54	RCL - 95
120	15	19.4	65	RCL - 120
150	16.5	21.2	65	RCL - 150
185	18.5	23.5	65	RCL - 185
240	21	26.5	89	RCL - 240
300	23.5	30	89	RCL - 300
400	28.5	36.5	90	RCL - 400
500	30	39	115	RCL - 500
550	31.7	41.5	115	RCL - 550
630	35	45	115	RCL - 630
800	39	50.6	230	RCL - 800
1000	43	56.2	230	RCL - 1000



Long Barrel Connector



Diagram

### FEATURES

- Connector Long Barrel for better Pull Out Strength
- Internal wire stops provided to prevent over insertion of conductor
- Tin Plated to inhibit corrosion
- Material - Electrolytic Copper