

All purpose cable lockout

The ergonomic, hand-fitted body makes it easy to tighten the cable. Can be used to lock out valves, disconnect switches, circuit breakers and more.

- Locks out multiple control points with a single device = reduced equipment costs
- Interchangeable cables, select the best type suited for the job
- High portability, a built-in eyelet helps keep the cable neatly coiled, prevents loose ends from dangling and causing a hazard when in use
- Body withstands chemicals and corrosion
- 4 Padlocks can be applied



| Order Reference | Description | Material | Length (m) | Diameter (mm) | Colour | Diameter (mm) | Clearance (mm) | Quantity |
|-----------------|---|---|------------|---------------|--------|---------------|----------------|----------|
| 050941* | All Purpose Cable Lockout with Non-Conductive Nylon Cable | Glass-filled Polyurethane Polymer & Glass-filled Nylon & Non-Conductive Nylon | 2.44 | 4.33 | Red | 7.00 | 20.00 | 1 |
| 050943 | All Purpose Cable Lockout with Vinyl Coated Metal Cable | Glass-filled Polyurethane Polymer & Glass-filled Nylon & Vinyl Coated Metal | 2.44 | 4.76 | Red | 7.00 | 20.00 | 1 |
| 050944 | All Purpose Cable Lockout without cable | Glass-filled Polyurethane Polymer & Glass-filled Nylon | - | - | Red | 7.00 | 20.00 | 1 |

*This product meets the ATEX Equipment Directive.

Additional Cables

| Order Reference | Description | Cable Length (m) | Colour | Diameter (mm) | Quantity |
|-----------------|-------------------------------------|------------------|--------|---------------|----------|
| 050945 | Non-Conductive Nylon Cable - 2.44 m | 2.44 | Red | 4.33 | 1 |
| 050947 | Vinyl Coated Metal Cable - 2.44 m | 2.44 | Red | 4.76 | 1 |
| 813642 | Vinyl Coated Metal Cable - 3.00 m | 3.00 | Red | 4.00 | 1 |
| 050948 | Non-Conductive Nylon Cable - 3.65 m | 3.65 | Red | 3.18 | 1 |
| 050950 | Vinyl Coated Metal Cable - 3.65 m | 3.65 | Red | 4.76 | 1 |
| 050951 | Non-Conductive Nylon Cable - 4.10 m | 4.10 | Red | 4.33 | 1 |
| 050954 | Non-Conductive Nylon Cable - 5.10 m | 5.10 | Red | 4.33 | 1 |



Universal valve lockout

Lockout gate valves using the cable attachment with the universal valve lockout.

- Locks out valves in open and closed positions
- Flexible modular system
- Made from industrial-grade steel and nylon for rugged durability, chemical and corrosion resistance
- Open-ended clamp fits over closed rings, wide handles



| Order Reference | Description | Colour | Max. Handle Thickness (mm) | Max. Valve Handle Width (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Quantity |
|-----------------|---|--------|----------------------------|------------------------------|----------------------------|-----------------------------|----------|
| 050899 | Large Universal Valve Lockout Base Clamping Unit | Red | 27.94 | 40.64 | 9.00 | 20.00 | 1 |
| 050924 | Small Universal Valve Lockout Base Clamping Unit | Red | 15.24 | 25.40 | 9.00 | 20.00 | 1 |
| 051395 | Cable attachment with 2.44 metre sheathed cable. Cable diameter 3.25 mm | Red | - | - | - | - | 1 |



PRO-LOCK II cable lockout device

This is a complete isolation safety system, ideal for securing valves or industrial machinery and can only be opened and locked by using a special operating tool (to be ordered separately).

- Polypropylene Moulding & Stainless Steel
- UV Stabilised
- Temperature resistance range: -50 °C to 55 °C
- Vinyl coated cable

Other cable lengths are available upon request.



| Order Reference | Description | Colour | Cable Length (m) | Cable Diameter (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Diameter (mm) | Quantity |
|-----------------|----------------------------|--------|------------------|---------------------|----------------------------|-----------------------------|---------------|----------|
| 225203 | Pro-Lock device with cable | Red | 1.50 | 3.50 | 6.50 | 20.00 | 50.00 | 1 |
| 225204 | Pro-Lock device with cable | Green | 1.50 | 3.50 | 6.50 | 20.00 | 50.00 | 1 |
| 225205 | Pro-Lock device with cable | Yellow | 1.50 | 3.50 | 6.50 | 20.00 | 50.00 | 1 |
| 225206 | Operating tool | Red | - | - | - | - | - | 1 |
| 225207 | Operating tool | Green | - | - | - | - | - | 1 |
| 225208 | Operating tool | Yellow | - | - | - | - | - | 1 |



Brady ball valve lockout

Brady ball valve lockouts are the ideal tool for securing your quarter-turn angled ball valves in the OFF position.

- Fits virtually any valve lever up to 76 mm
- Available in 2 sizes
- Service Temperature from -30 °C to 120 °C

| Order Reference | Description | Material | Max. Handle Thickness (mm) | Max. Valve Handle Width (mm) | Size valve lever (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | # of Holes | Quantity |
|-----------------|--------------------------------|----------|----------------------------|------------------------------|-----------------------|----------------------------|-----------------------------|------------|----------|
| 065666* | Small Brady Ball Valve Lockout | Nylon | 7.62 | 30.48 | 6 - 25 | 7.00 | 25.00 | 8 | 1 |
| 065692 | Small Brady Ball Valve Lockout | Steel | 6.92 | 30.48 | 6 - 25 | 9.53 | 19.00 | 6 | 1 |
| 065669 | Large Brady Ball Valve Lockout | Steel | 12.70 | 53.34 | 32 - 76 | 7.00 | 19.00 | 15 | 1 |
| 065693 | Large Brady Ball Valve Lockout | Steel | 12.70 | 48.26 | 32 - 76 | 9.53 | 19.00 | 7 | 1 |

*This product meets the ATEX Equipment Directive.



Non-conductive ball valve lockout

Intuitive and easy to place safety device.



- Locks quarter-turn ball valves in OFF position
- Made from strong polypropylene plastic, resistant to cracking, abrasion and chemical products
- Resistant to extreme temperature -46 °C to 183 °C

| Order Reference | Description | Colour | Height (mm) | Width (mm) | Size valve lever (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Quantity |
|-----------------|-----------------------------------|--------|-------------|------------|-----------------------|----------------------------|-----------------------------|----------|
| 225340 | Non-Conductive Ball Valve Lockout | Red | 125.00 | 95.00 | 190 - 250 | 7.00 | 20.00 | 1 |

Butterfly valve lockout

Created to secure your butterfly valve efficiently!

- Made of strong polypropylene plastic
- Fully dielectric (non-conductive)
- Highly resistant to cracking and abrasion
- Highly resistant to solvents and other chemical products
- Resistant to extreme temperature changes from -46 °C to 183 °C
- 2 padlocks can be applied
- Available in several colours

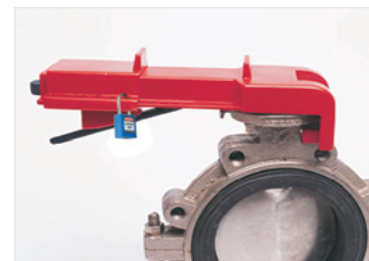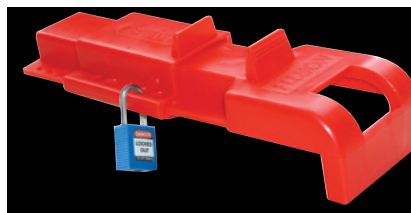

| Order Reference | Description | Colour | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Height (mm) | Length (mm) | Width (mm) | Quantity |
|-----------------|-------------------------|--------|----------------------------|-----------------------------|-------------|-------------|------------|----------|
| 256960 | Butterfly Valve Lockout | Red | 8.00 | 25.00 | 70.00 | 305.00 | 102.00 | 1 |



Ball valve lockout

Versatile and easy-to-use device. The two halves of the device encompass the ball valve lever to secure it from inadvertent activation of the valve.

- Small device locks out valves in open and closed position for pipes from 14.50 - 52.50 mm diameter
- Large device locks out valves in closed position for pipes from 50 - 200 mm diameter
- Versatile and easy-to-use
- Made from Ultra-tough Polypropylene
- Service temperature from -20 °C to 80 °C



| Order Reference | Colour | Pipe Diameter (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Quantity |
|-----------------|--------|--------------------|----------------------------|-----------------------------|----------|
| Small | | | | | |
| 800110* | Red | 14,50 - 52,50 | 7.24 | 38.00 | 1 |
| 805847 | Blue | 14,50 - 52,50 | 7.24 | 38.00 | 1 |
| 805848 | Green | 14,50 - 52,50 | 7.24 | 38.00 | 1 |
| 805849 | Yellow | 14,50 - 52,50 | 7.24 | 38.00 | 1 |
| Large | | | | | |
| 800111 | Red | 50.00 - 200.00 | 7.24 | 38.00 | 1 |
| 805850 | Blue | 50.00 - 200.00 | 7.24 | 38.00 | 1 |
| 805851 | Green | 50.00 - 200.00 | 7.24 | 38.00 | 1 |
| 805852 | Yellow | 50.00 - 200.00 | 7.24 | 38.00 | 1 |

*This product meets the ATEX Equipment Directive.



Gas cylinder lockout

No need to match your lockout device to varying diameters and threads of cylinder caps.

- Prevents access to the main cylinder valve
- Accommodates neck rings up to 88 mm diameter
- Install in seconds to save time
- 1 padlock can be applied



| Order Reference | Description | Height (mm) | Diameter (mm) | Max. Shackle Diameter (mm) | | |
|-----------------|----------------------|-------------|---------------|----------------------------|-------|---|
| 045629 | Gas Cylinder Lockout | 158.80 | 88.10 | 7.00 | 20.00 | 1 |

Standard gate valve lockout


The easiest device that fits your gate valve.

- Locks out gate valves with different hand wheel diameters
- Made of durable polypropylene – superior impact & chemical resistance
- Withstands temperatures from -20 °C to 150 °C
- Available in several sizes and colours
- Colours allow a coding. Transparency allows instant visibility on the valve colour and status.
- Padlock can be applied

Comes with danger labels in English, Spanish and French



| Order Reference | Hand Wheel Diameter (mm) | Height (mm) | Width (mm) | Depth (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Quantity |
|--------------------|--------------------------|-------------|------------|------------|----------------------------|-----------------------------|----------|
| Blue | | | | | | | |
| 065585 | 25 - 64 | 80.00 | 120.10 | 35.90 | 9.53 | 19.00 | 1 |
| 065586 | 64 - 127 | 141.70 | 184.80 | 50.60 | 9.53 | 19.00 | 1 |
| 065587 | 127 - 165 | 181.00 | 224.10 | 60.40 | 9.53 | 19.00 | 1 |
| 065588 | 165 - 254 | 276.20 | 318.30 | 76.20 | 9.53 | 19.00 | 1 |
| 065589 | 254 - 330 | 363.50 | 405.10 | 76.20 | 9.53 | 19.00 | 1 |
| Green | | | | | | | |
| 065595 | 25 - 64 | 80.00 | 120.10 | 35.90 | 9.53 | 19.00 | 1 |
| 065596 | 64 - 127 | 141.70 | 184.80 | 50.60 | 9.53 | 19.00 | 1 |
| 065597 | 127 - 165 | 181.00 | 224.10 | 60.40 | 9.53 | 19.00 | 1 |
| 065598 | 165 - 254 | 276.20 | 318.30 | 76.20 | 9.53 | 19.00 | 1 |
| 065599 | 254 - 330 | 363.50 | 405.10 | 76.20 | 9.53 | 19.00 | 1 |
| Red | | | | | | | |
| 065560* | 25 - 64 | 80.00 | 120.10 | 35.90 | 9.53 | 19.00 | 1 |
| 065561* | 64 - 127 | 141.70 | 184.80 | 50.60 | 9.53 | 19.00 | 1 |
| 065562* | 127 - 165 | 181.00 | 224.10 | 60.40 | 9.53 | 19.00 | 1 |
| 065563* | 165 - 254 | 276.20 | 318.30 | 76.20 | 9.53 | 19.00 | 1 |
| 065564* | 254 - 330 | 363.50 | 405.10 | 76.20 | 9.53 | 19.00 | 1 |
| Transparent | | | | | | | |
| 145581 | 25 - 64 | 80.00 | 120.10 | 35.90 | 9.70 | 19.00 | 1 |
| 145582 | 64 - 127 | 141.70 | 184.80 | 50.60 | 9.70 | 19.00 | 1 |
| 145583 | 127 - 165 | 181.00 | 224.10 | 60.40 | 9.70 | 19.00 | 1 |
| 145584 | 165 - 254 | 276.20 | 318.30 | 76.20 | 9.70 | 19.00 | 1 |
| 145585 | 254 - 330 | 363.50 | 405.10 | 76.20 | 9.70 | 19.00 | 1 |
| Yellow | | | | | | | |
| 065590 | 25 - 64 | 80.00 | 120.10 | 35.90 | 9.53 | 19.00 | 1 |
| 065591 | 64 - 127 | 141.70 | 184.80 | 50.60 | 9.53 | 19.00 | 1 |
| 065592 | 127 - 165 | 181.00 | 224.10 | 60.40 | 9.53 | 19.00 | 1 |
| 065593 | 165 - 254 | 276.20 | 318.30 | 76.20 | 9.53 | 19.00 | 1 |
| 065594 | 254 - 330 | 363.50 | 405.10 | 76.20 | 9.53 | 19.00 | 1 |

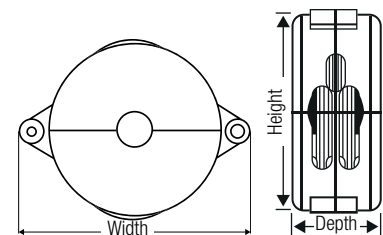

Adjustable gate valve lockout

One device for most gate valves!

It replaces 3 conventional gate valve lockouts to reduce your costs.

- Adjusts to fit gate valves from 2.5 to 16.5 cm
- Durable polypropylene
- Resistant to extreme temperature changes from -20 °C to 80 °C
- 3 padlocks can be applied



| Order Reference | Description | Height (mm) | Width (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Quantity |
|-----------------|-------------------------------|-------------|------------|----------------------------|-----------------------------|----------|
| 064057 | Adjustable Gate Valve Lockout | 130.00 | 209.00 | 9.40 | 20.00 | 1 |

Miniature circuit breaker lockout

A safe and effective method for locking out European Circuit Breakers as it fits most of their existing types.

- Miniature breaker lockout unique in its kind = requires NO TOOLS to install
- The lockout easily installs with the aid of a Push Button
- The tie-bar style lockout has a convenient thumb wheel for quick application
- Suitable for single, multi-pole and rotary breakers
- Made from glass-filled nylon
- Available in single or six pack
- 1 padlock can be applied

Recommended to use in combination with a padlock with a minimum shackle diameter of 6 mm for added safety.

| Order Reference | Description | Max. Shackle Diameter (mm) | Quantity |
|-----------------|---|----------------------------|----------|
| 1 Kit / Piece | | | |
| 805853 | Miniature Breaker Lockout Demo Kit* | 7.00 | 1 |
| 1 Piece / Pack | | | |
| 090847 | Miniature Circuit Breaker Lockouts - Pin-In Standard | 7.00 | 1 |
| 090844 | Miniature Circuit Breaker Lockouts - Pin-Out Standard | 7.00 | 1 |
| 090850 | Miniature Circuit Breaker Lockouts - Pin-Out Wide | 7.00 | 1 |
| 090853 | Miniature Circuit Breaker Lockouts - Tie-Bar | 7.00 | 1 |
| 149433 | Miniature Circuit Breaker - Pin-out Wide (ABB-MS325) | 8.13 | 1 |
| 6 Pieces / Pack | | | |
| 090848 | Miniature Circuit Breaker Lockouts - Pin-In Standard | 7.00 | 6 |
| 090845 | Miniature Circuit Breaker Lockouts - Pin-Out Standard | 7.00 | 6 |
| 090851 | Miniature Circuit Breaker Lockouts - Pin-Out Wide | 7.00 | 6 |
| 090854 | Miniature Circuit Breaker Lockouts - Tie-Bar | 7.00 | 6 |
| 149434 | Miniature Circuit Breaker - Pin-out Wide (ABB-MS325) | 8.13 | 6 |

* Kit contains 1 part of each (090874, 090844, 090850, 090853, 149433, 149514)



Pin-Out Standard
Consult the technical datasheet LOTO-1 on bradyeurope.com/tds



Pin-In Standard
Consult the technical datasheet LOTO-25 on bradyeurope.com/tds



Pin-Out Wide
Consult the technical datasheet LOTO-26 on bradyeurope.com/tds



Tie-Bar
Consult the technical datasheet LOTO-27 on bradyeurope.com/tds




Pin-Out Wide (ABB-MS325)
Consult the technical datasheet LOTO-95 on bradyeurope.com/tds



480-600V breaker lockout

Perfect for locking out oversized and irregularly shaped switches.

- Self adhesive backed rails are permanently installed onto an electrical panel – simply clean panel surface and adhere – no drilling required!
- Red blocking bar indicates locked “off
- Green blocking bar indicates locked “on
- 1 padlock can be applied



Breaker Blocker Components - Blocking Bar Holder

| Order Reference | Description | Colour | Length (mm) | Height (mm) | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Max. Switch Width (mm) | Quantity |
|-----------------|---|--------|-------------|-------------|----------------------------|-----------------------------|------------------------|----------|
| 090891** | 480-600V Breaker Lockout Kit* | | - | 20.32 | 6.50 | 20.00 | 150.00 | 1 |
| 051264 | Breaker Blocker Components - 101 mm Yellow Mounting Rails | Yellow | 101.60 | 20.32 | - | - | - | 2 |
| 090893 | Breaker Blocker Components - 190 mm Green Blocking Bar | Green | 190.00 | - | - | - | - | 5 |
| 090892 | Breaker Blocker Components - 190 mm Red Blocking Bar | Red | 190.00 | - | - | - | - | 5 |
| 051265 | Breaker Blocker Components - Blocking Bar Holder | Yellow | 150.00 | 20.32 | - | - | - | 5 |

*Kit includes: 2 Yellow mounting rails, 1 red blocking bar, 1 green blocking bar and 3 alcohol wipes.

**This product meets the ATEX Equipment Directive.

Fuse lockout

Designed to prevent the unintended re-energisation of a fuse. Fits most fuse holders between 20 Amps and 400 Amps and creates a universal approach to locking out your fuses.

- Material: Nylon with ZP metal slotted set screw
- Instructions: clamp onto the fuse holder and use a small flathead screwdriver to tighten the set screw in the device. Place a padlock through the hole to prevent access to the set screw.
- Label applied stating: DANGER DO NOT REMOVE LOCKED OUT
- 1 padlock can be applied

| Order Reference | Description | Height (mm) | Width (mm) | Depth (mm) | Packaging |
|-----------------|-----------------------------|-------------|------------|------------|-----------|
| 873367 | Fuse Lockout Device 20-400A | 35.00 | 15.00 | 60.00 | 1 |



“No-hole” circuit breaker lockout

Works on wide range or single-pole and internal-trip multi-pole breakers.

- Use thumbscrews to clamp lockout securely onto switch tongue, then pull cover over thumbscrew and lock in place to prevent clamp from being loosened
- Made of rugged Polypropylene & Moulded Glass-filled Nylon
- Detachable cleats (included) expand the range of applicable breakers
- 1 padlock can be applied



| Order Reference | Description | Height (mm) | Width (mm) | Depth (mm) | Max. Shackle Diameter (mm) | Max. Switch Width (mm) | Quantity |
|-----------------|--|-------------|------------|------------|----------------------------|------------------------|----------|
| 065396 | No Hole Circuit Breaker Lockout - 277 Volt Device | 24.10 | 56.00 | 25.40 | 7.00 | 16.00 | 1 |
| 065965 | No Hole Circuit Breaker Lockout - 277 Volt Device | 24.10 | 56.00 | 25.40 | 7.00 | 16.00 | 6 |
| 065397* | No Hole Circuit Breaker Lockout - 480-600 Volts Device | 40.30 | 82.60 | 55.20 | 7.00 | 38.00 | 1 |
| 065966 | No Hole Circuit Breaker Lockout - 480-600 Volts Device | 40.30 | 82.60 | 55.20 | 7.00 | 38.00 | 6 |
| 065404 | Extra Cleats for 120/277V Lockout | 50.74 | 28.70 | 7.37 | - | - | 6 |
| 065406 | Extra Cleats for 480/600V Lockout | 50.74 | 28.70 | 7.37 | - | - | 6 |

*This product meets the ATEX Equipment Directive.

Lockout: consult the technical datasheet LOTO-14 on bradyeurope.com/tds

Cleats: consult the technical datasheet LOTO-17 on bradyeurope.com/tds

Oversized breaker lockout device

- Oversized 480-600 Volt frame lockout, fits breakers up to 57.15 mm wide by 22.20 mm thick
- 1 padlock can be applied

| Order Reference | Specification | Additional Information | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Max. Switch Width (mm) | Quantity |
|-----------------|----------------------------------|--|----------------------------|-----------------------------|------------------------|----------|
| 065321 | Oversized Breaker Lockout Device | 480-600 Volt, fits breakers up to 57.15 mm wide by 22.2 mm thick | 7.00 | 20.00 | 57.15 | 6 |
| 065329 | Oversized Breaker Lockout Device | 480-600 Volt, fits breakers up to 57.15 mm wide by 22.2 mm thick | 7.00 | 20.00 | 57.15 | 1 |



3-in-1 electrical plug lockout

Accommodates high and low-voltage plugs up to 76.0 mm in diameter and 139.0 mm in length.

- Two sliding top lids can be used individually or together to accommodate small, medium and large diameter cords up to 31 mm
- Made in bright yellow thermoplastic
- With English instruction labels
- 1 padlock can be applied

| Order Reference | Description | Colour | Height (mm) | Diameter (mm) | Cable Diameter (mm) | Quantity |
|-----------------|--------------------------------|--------|-------------|---------------|---------------------|----------|
| 045842 | 3-in-1 Electrical Plug Lockout | Yellow | 158.75 | 88.14 | 31.00 | 1 |

Lockout devices for plug connections

Highly effective against unauthorised or incorrect use of electrical equipment.

- Simple to use
- Especially developed to secure all types of plugs



| Order Reference | Description | Colour | Max. Shackle Diameter (mm) | Min. Shackle Clearance (mm) | Width (mm) | Cable Diameter (mm) | Max number of padlocks applied | Quantity |
|-----------------|--|--------|----------------------------|-----------------------------|------------|---------------------|--------------------------------|----------|
| 065675 | Lockout Devices for Plug Connections - Large | Red | 7.00 | 20.00 | 178.00 | 22.00 | 4 | 1 |
| 065674* | Lockout Devices for Plug Connections - Small | Red | 7.00 | 20.00 | 88.90 | 10.00 | 2 | 1 |

*This product meets the ATEX Equipment Directive.

Hubbell plugout for industrial plug connections

Effectively secures all industrial plug connections.


- Fits the majority of your heavier industrial plug applications
- Small version accepts plugs with maximum 69.85 mm diameter and 120.65 mm length with 25.40 mm cord.



| Order Reference | Specification | Colour | Height (mm) | Width (mm) | Length (mm) | Diameter (mm) | Diameter (mm) | Diameter (mm) | Clearance (mm) | of padlocks applied | Quantity |
|-----------------|-------------------------|--------|-------------|------------|-------------|---------------|---------------|---------------|----------------|---------------------|----------|
| 065695 | Hubbell Plugout - Small | Yellow | 80.00 | 106.00 | 120.00 | 70.00 | 7.00 | 25.00 | 20.00 | 4 | 1 |
| 065698 | Hubbell Plugout - Large | Yellow | 120.00 | 120.00 | 250.00 | 100.00 | 7.00 | 35.00 | 20.00 | 4 | 1 |

Large electrical/pneumatic lockout

Accommodates a large variety of electrical plugs up to 89 mm diameter and 127 mm in length as well as male air hose connectors.

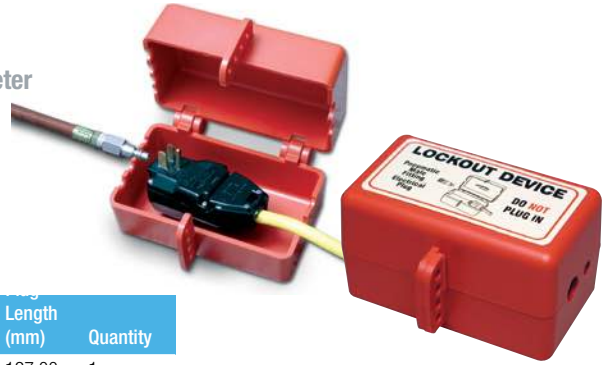

- Works on 110V, 220V and 550V plugs
- Made of Polystyrene material
- 4 padlocks can be applied

| Order Reference | Description | Colour | Diameter (mm) | Clearance (mm) | Diameter (mm) | Length (mm) | Quantity |
|-----------------|------------------------------------|--------|---------------|----------------|---------------|-------------|----------|
| 800126 | Large Electrical/Pneumatic Lockout | Red | 7.00 | 20.00 | 89.00 | 127.00 | 1 |



Twist and Secure™ push button & e-stop covers

Made to temporarily prevent access to the on/off and emergency stop controls for production and facility utility operating equipment.

- Fast and convenient lockout at the point of need.
- One time installation of the low profile, unobtrusive lockout base.
- Provides an obvious, visual indication that the equipment control button is locked out, as well as a view through the translucent cover of the ON/OFF status of E-Stop buttons.
- Standardised bases allow authorised workers to apply a single provided cover to any of numerous equipment control buttons.



Total Package

| Order Reference | Description | Height (mm) | Quantity |
|-----------------|--|-------------|----------|
| 139793 | Push Button Lockout Device (16 mm), Clear, with Standard Cover | 50.00 | 1 |
| 139794 | Push Button Lockout Device (16 mm), Clear, with Tall Cover | 80.00 | 1 |
| 134018 | Push Button Lockout Device (16 mm), Red, with Standard Cover | 50.00 | 1 |
| 130819 | Push Button Lockout Device (16 mm), Red, with Tall Cover | 80.00 | 1 |
| 139795 | Push Button Lockout Device (22 mm), Clear, with Standard Cover | 50.00 | 1 |
| 130820 | Push Button Lockout Device (22 mm), Red, with Standard Cover | 50.00 | 1 |
| 139796 | Push Button Lockout Device (30 mm), Clear, with Standard Cover | 55.00 | 1 |
| 130821 | Push Button Lockout Device (30 mm), Red, with Standard Cover | 55.00 | 1 |

Package without cover

| Order Reference | Description | Quantity |
|-----------------|--|----------|
| 130822 | 16 mm Push Button/E-Stop Lockout Bases, 5 Pk | 5 |
| 130823 | 22 mm Push Button/E-Stop Lockout Bases 5 Pk | 5 |
| 130824 | 30 mm Push Button/E-Stop Lockout Bases 5 Pk | 5 |

Supplied with 5 clear labels, 5 red labels and 5 yellow labels

Wall switch lockouts

Wall switch lockouts may be used with most wall-mounted switches.

- Easy to install using existing screws
- Locks switch in "on" or "off" position
- High visibility colour
- Service temperature from -20 °C to 80 °C
- 1 padlock can be applied

| Order Reference | Description | Material | Text/Legend | Colour | Max. Switch Width (mm) | Quantity |
|-----------------|---------------------|---------------|------------------------|--------|------------------------|----------|
| 065392 | Wall Switch Lockout | Polypropylene | LOCKED ON / LOCKED OFF | Red | 14.50 | 1 |

