

SEE Cable Terminal

Insulated Spade Terminals

Material
Insulation: PVC
Terminal Body: Copper
Plating: Tin

Wire range: 0.5~1.5mm² (A.W.G. 22~16) I_{max}=19A




Item No	Stud size	Dimension(mm)						Color
		d2	B	L	F	H	D φ	
SV1.25-3.2	#4	3.2	5.7	21.2	6.5	10.0	4.3	Red
SVS1.25-3.5	#6	3.7	5.7	21.2	6.5			
SVL1.25-3.5	#6	3.7	6.4	21.2	6.5			
SVS1.25-4	#8	4.3	6.4	21.2	6.5			
SVM1.25-4	#8	4.3	7.2	21.2	6.5			
SVL1.25-4	#8	4.3	8.1	21.2	6.5			
SVS1.25-5	#10	5.3	8.1	21.2	6.5			
SVL1.25-5	#10	5.3	9.5	21.2	6.5			
SVS1.25-6	1/4	6.4	9.5	21.2	6.5			
SVL1.25-6	1/4	6.4	12.0	27.2	11.0			
SV1.25-8	5/16	8.4	14.0	29.0	12.5			

Wire range: 1.5~2.5mm² (A.W.G. 16~14) I_{max}=27A



Item No	Stud size	Dimension(mm)						Color
		d2	B	L	F	H	D φ	
SV2-3.2	#4	3.2	5.7	21.2	6.5	10.0	4.9	Blue
SVS2-3.5	#6	3.7	5.7	21.2	6.5			
SVL2-3.5	#6	3.7	6.0	21.2	6.5			
SVS2-4	#8	4.3	6.4	21.2	6.5			
SVM2-4	#8	4.3	7.2	21.2	6.5			
SVL2-4	#8	4.3	8.1	21.2	6.5			
SVS2-5	#10	5.3	8.1	21.2	6.5			
SVL2-5	#10	5.3	9.5	21.2	6.5			
SVS2-6	1/4	6.4	9.5	21.2	6.5			
SVL2-6	1/4	6.4	12.0	27.2	11.0			
SV2-8	5/16	8.4	14.0	29.0	12.5			

Wire range: 2.5~4mm² (A.W.G. 14~12) I_{max}=37A

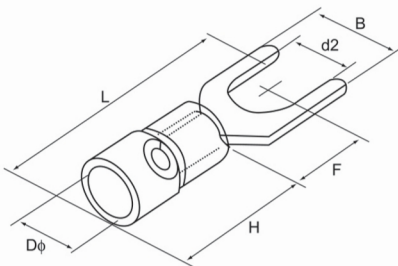

Item No	Stud size	Dimension(mm)						Color
		d2	B	L	F	H	D φ	
SV3.5-3	#4	3.2	5.7	24.8	7.0	13.0	6.2	Black
SV3.5-4	#8	4.3	8.0	24.8	7.0			
SV3.5-5	#10	5.3	8.0	24.8	7.0			
SV3.5-6	1/4	6.4	12.0	28.0	12.1			
SV3.5-8	5/16	8.4	12.0	33.7	13.7			

Wire range: 4~6mm² (A.W.G. 12~10) I_{max}=48A

Item No	Stud size	Dimension(mm)						Color
		d2	B	L	F	H	D φ	
SV5.5-3.5	#6	3.7	8.3	25.2	7.5	13.0	6.7	Yellow
SVS5.5-4	#8	4.3	8.3	25.2	7.5			
SVL5.5-4	#8	4.3	9.0	25.2	7.5			
SV5.5-5	#10	5.3	9.0	25.2	7.5			
SVS5.5-6	1/4	6.4	9.0	25.2	7.5			
SVL5.5-6	1/4	6.4	12.0	31.2	12.0			
SV5.5-8	5/16	8.4	14.0	30.0	11.5			