

SEE Cable Terminal

Insulated Bullet Male Disconnects

Material

Insulation: PVC
Terminal Body: Brass
Plating: Tin

Wire range: 0.5~1.5mm² (A.W.G. 22~16)I_{max}=10A


Item No	Dimension(mm)					Color
	b φ	F	D φ	H	L	
MPD1.25-156	4.0	11.0	1.7	10.0	21.0	Red
MPD1.25-176	4.5	14.0	1.7	10.0	24.0	

Wire range: 1.5~2.5mm² (A.W.G. 16~14)I_{max}=15A

Item No	Dimension(mm)					Color
	b φ	F	D φ	H	L	
MPD2-156	4.0	11.0	2.3	10.0	21.0	Blue
MPD2-176	4.5	14.0	2.3	10.0	24.0	
MPD2-195	5.0	11.0	2.3	10.0	21.0	

Wire range: 4~6mm² (A.W.G. 12~10)I_{max}=24A

Item No	Dimension(mm)					Color
	b φ	F	D φ	H	L	
MPD5.5-195	5.0	12.0	3.4	13.0	25.0	Yellow

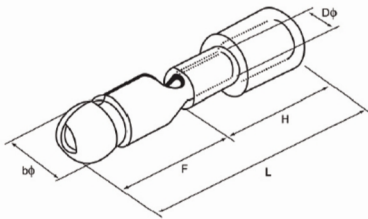

SEE Cable Terminal

Insulated Bullet Female Disconnects

Material

Insulation: PVC
Terminal Body: Brass
Plating: Tin

Wire range: 0.5~1.5mm² (A.W.G. 22~16)I_{max}=10A

Item No	Dimension(mm)					Color
	b φ	F	D φ	H	L	
FRD1.25-156	4.0	6.3	1.7	13.0	24.0	Red
FRD1.25-176	4.5	6.3	1.7	13.0	24.0	

Wire range: 1.5~2.5mm² (A.W.G. 16~14)I_{max}=15A

Item No	Dimension(mm)					Color
	b φ	F	D φ	H	L	
FRD2-156	4.0	6.3	2.3	14.0	24.5	Blue
FRD2-176	4.5	6.3	2.3	14.0	24.5	
FRD2-195	5.0	7.0	2.3	14.0	24.5	

Wire range: 4~6mm² (A.W.G. 12~10)I_{max}=24A

Item No	Dimension(mm)					Color
	b φ	F	D φ	H	L	
FRD5.5-195	5.0	7.0	3.4	14.0	29.5	Yellow

